

(12) INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(19) World Intellectual Property Organization
International Bureau



(43) International Publication Date
24 January 2002 (24.01.2002)


PCT

(10) International Publication Number
WO 02/05867 A2

- (51) International Patent Classification⁷: **A61M** (74) Agent: **VIKSINS, Ann, S.**; Schwegman, Lundberg, Woessner & Kluth, P.O. Box 2938, Minneapolis, MN 55402 (US).
- (21) International Application Number: **PCT/US01/22070**
- (22) International Filing Date: **13 July 2001 (13.07.2001)**
- (25) Filing Language: **English**
- (26) Publication Language: **English**
- (30) Priority Data:
09/615,276 **13 July 2000 (13.07.2000)** **US**
- (71) Applicant (for all designated States except US): **MEDAM-ICUS, INC.** [US/US]; 15301 Highway 55 West, Minneapolis, MN 55447 (US).
- (72) Inventors; and
- (75) Inventors/Applicants (for US only): **LANGE, Michael** [US/US]; 1708 Fair Oaks Drive, White Bear Lake, MN 55110 (US). **KRAUS, Mark, C.** [US/US]; 6935 Dylan Lane, Independence, MN 55359 (US).
- (81) Designated States (national): AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NO, NZ, PL, PT, RO, RU, SD, SE, SG, SI, SK, SL, TJ, TM, TR, TT, TZ, UA, UG, US, UZ, VN, YU, ZA, ZW.
- (84) Designated States (regional): ARIPO patent (GH, GM, KE, LS, MW, MZ, SD, SL, SZ, TZ, UG, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, CH, CY, DE, DK, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE, TR), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, GW, ML, MR, NE, SN, TD, TG).

[Continued on next page]

(54) Title: **INTRODUCER HAVING A MOVABLE VALVE ASSEMBLY WITH REMOVABLE SIDE PORT**

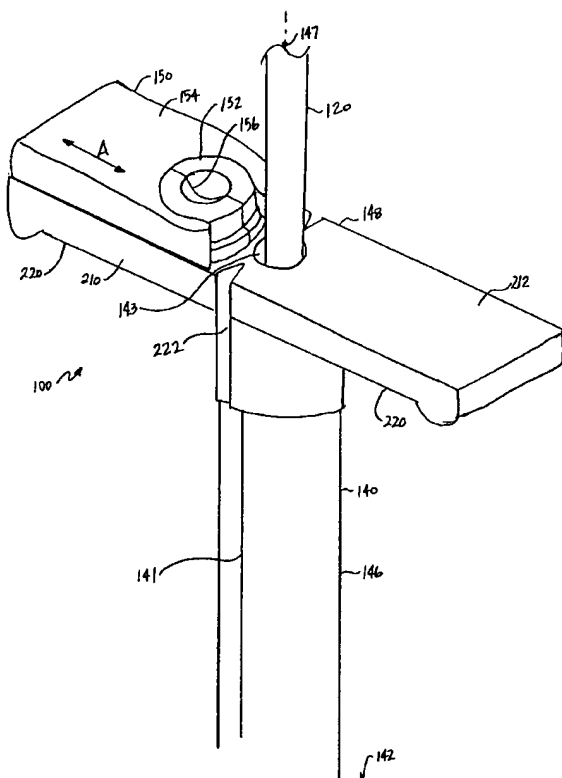

(57) Abstract: An introducing apparatus includes an elongate tubular sheath having an external diameter, and the sheath has a bore including an internal diameter sized to receive a dilator therethrough. The sheath includes at least one tab extending away from a longitudinal axis of the sheath. A movable valve assembly is movably engaged with the tab, where the moving valve is adapted to move from a first position to a second position. In the first position the moving valve is disposed through the longitudinal axis of the sheath. In the second position the moving valve assembly is disposed away from the longitudinal axis of the sheath.

WO 02/05867 A2

BEST AVAILABLE COPY



Published:

— without international search report and to be republished
upon receipt of that report

For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.

INTRODUCER HAVING A MOVABLE VALVE ASSEMBLY WITH REMOVABLE SIDE PORT

5

Technical Field

The present invention generally relates to introducers and introducing assemblies. Specifically, it relates to an introducer with a hemostatic valve.

10

Background

Introducer devices are employed for inserting catheters, guidewires, or other medical devices into patients. A typical procedure provides for insertion of a needle into the vasculature of a patient. After insertion of the needle, a guide wire is inserted through the needle, and the needle is removed. The dilator and the sheath are inserted over the guidewire, and the dilator and guidewire may be removed leaving the sheath protruding from the patient's vein. A diagnostic or therapeutic catheter (e.g. a central venous access catheter) or guide wire or other medical device, is then inserted through the sheath into the patient.

20

Peelable sheaths are available, where the sheath can be peeled off of a catheter, for example, as that shown in U.S. Patent No. 4,345,606 to Littleford on Aug. 24, 1982. However, once a sheath is inserted, and the dilator and guidewire have been removed, the sheath provides a passage for a flow of blood, where such uncontrolled blood loss can have a negative affect on a patient. Another problem with the sheath is that the sheath allows for the introduction of air into the vein of the patient. If air is inadvertently introduced into the vein, an air embolism may result with negative effects. One solution is found in U.S. Patent No. 5,304,142 issued to Liebl on Apr. 19, 1994, and assigned to Medamicus, Inc. Another approach is described in U.S. Patent No. 5,125,904, issued to Lee in Jun. 30, 1992. However, the sheath in the '904 Patent may experience resistance to pulling apart, and separating the sheath may prove to be difficult. In addition, the technician may experience difficulty

30

in inserting an instrument or medical device through the valve. One solution is to lubricate the valve with silicone. However this results in silicone becoming inadvertently transferred to other medical instruments, or technicians.

Accordingly, what is needed is an introducer and dilator which seals an
5 introducer to a catheter or other medical instruments. What is also needed is a sealing device which does not distract or interfere with the implantation process.

Summary

10 An introducing apparatus includes an elongate tubular sheath having an external diameter, and the sheath has a bore including an internal diameter sized to receive a dilator therethrough, where the sheath is separable. The sheath includes at least one tab extending away from a longitudinal axis of the sheath. A sliding valve assembly is slidably engaged with the tab, where the
15 sliding valve is adapted to slide from a first position to a second position. In the first position the sliding valve is disposed through the longitudinal axis of the sheath. In the second position the sliding valve assembly is disposed away from the longitudinal axis of the sheath.

Options for the above introducing apparatus include as follows. In one
20 option, the sliding valve assembly includes a membrane coupled with a sliding member, where the membrane optionally includes a slit therein. Alternatively, the tab is defined in part by a tab longitudinal axis, and the sliding valve assembly is adapted to slide along the tab longitudinal axis. In another option, the sliding valve assembly is adapted to rotate about a hinge point on the at
25 least one tab. Optionally, the introducing apparatus includes a removable side port. In yet another option, the sliding valve assembly includes a valve support member coupled with a seal, and the valve support member extends only partially around the seal.

An introducing apparatus includes an elongate tubular sheath having an
30 external diameter, and the sheath has a bore including an internal diameter

sized to receive a dilator therethrough. The sheath includes at least one tab extending away from a longitudinal axis of the sheath. A movable valve assembly is movably engaged with the tab, where the movable valve is adapted to move from a first position to a second position. In the first position the
5 movable valve is disposed through the longitudinal axis of the sheath. In the second position the movable valve assembly is disposed away from the longitudinal axis of the sheath.

Options for the above introducing apparatus include as follows. One example of an option is that the movable valve assembly is adapted to slide
10 relative to the tab. In another example of an option, the sheath is optionally separable. In another option, the sliding valve assembly includes a membrane coupled with a moving member, where the membrane optionally includes a slit therein. Alternatively, the tab is defined in part by a tab longitudinal axis, and the movable valve assembly is adapted to slide along the tab longitudinal axis.
15 In another option, the movable valve assembly is adapted to rotate about a hinge point on the at least one tab. Optionally, the introducing apparatus includes a removable side port. In yet another option, the movable valve assembly includes a valve support member coupled with a seal, and the valve support member extends only partially around the seal.

20 A method includes inserting an introducing apparatus into a body. The introducing apparatus includes an elongate tubular sheath which has an external diameter, and the sheath has a bore including an internal diameter sized to receive a dilator therethrough. The sheath includes at least one tab which extends away from a longitudinal axis of the sheath. A movable valve
25 assembly is movably coupled with the at least one tab. The method further includes moving the valve assembly from a first position to a second position. In the first position, the movable valve assembly is disposed through the longitudinal axis of the sheath. In the second position the movable valve assembly is disposed away from the longitudinal axis of the sheath.

Optionally, the method further includes flexing the valve assembly as an instrument is inserted therethrough.

An introducing apparatus is also described which includes an elongate, separable tubular sheath that is defined in part by an external diameter. The sheath includes a bore which has an internal diameter sized to receive a dilator therethrough. The sheath further includes at least one tab that extends away from a longitudinal axis of the sheath. The introducing apparatus further includes a side port assembly removably coupled with the sheath. The side port assembly is adapted to be removed from the sheath without damage or separation of the sheath. In one option, the side port assembly is coupled with the sheath with a snap-fit connection. Alternatively, the side port assembly is threadingly coupled with the sheath. In another option, the side port assembly includes a valve disposed between the sheath and the side port.

The present introducing assembly requires fewer parts, and is cheaper to make. In addition, since the valve is optionally moved away from the longitudinal axis prior to splitting of the sheath, the splitting of the sheath is easier to do. The implanter has more options in sealing the introducing apparatus, including the option of having the valve moved out of the way during a procedure. A further benefit is that a more effective seal is made around the catheter or medical instrument since the device which retains or supports the valve optionally flexes, for example, as instruments are inserted therethrough. Furthermore, the introducing assembly allows for more flexible instruments to be inserted therethrough, where no damage occurs to the distal end of the flexible instruments which might occur with prior valve designs.

These and other embodiments, aspects, advantages, and features of the present invention will be set forth in part in the description which follows, and in part will become apparent to those skilled in the art by reference to the following description of the invention and referenced drawings or by practice of the invention. The aspects, advantages, and features of the invention are realized and attained by means of the instrumentalities, procedures, and

combinations particularly pointed out in the appended claims and their equivalents.

Brief Description of the Drawings

- | | | |
|----|-----------|---|
| 5 | Figure 1A | illustrates a perspective view of an introducing apparatus as constructed in accordance with one embodiment. |
| | Figure 1B | illustrates a perspective view of an introducing apparatus as constructed in accordance with one embodiment. |
| | Figure 2A | illustrates a first side elevational view of a portion of an |
| 10 | | introducing apparatus as constructed in accordance with one embodiment. |
| | Figure 2B | illustrates a top plan view of a portion of an introducing apparatus as constructed in accordance with one embodiment. |
| | Figure 2C | illustrates a second side elevational view of a portion of an introducing apparatus as constructed in accordance with one embodiment. |
| 15 | | |
| | Figure 3 | illustrates a side elevational view of a portion of an introducing apparatus as constructed in accordance with another embodiment. |
| 20 | | |
| | Figure 4A | illustrates a top plan view of a portion of an introducing apparatus as constructed in accordance with one embodiment. |
| | Figure 4B | illustrates a cross-sectional view taken along 4A-4A on Figure 4A. |
| 25 | | |
| | Figure 5A | illustrates a top plan view of a portion of an introducing apparatus as constructed in accordance with one embodiment. |

- Figure 5B illustrates a top plan view of a portion of an introducing apparatus as constructed in accordance with one embodiment.
- 5 Figure 5C illustrates a top plan view of a portion of an introducing apparatus as constructed in accordance with one embodiment.
- Figure 6 illustrates a side elevational view of an introducing apparatus as constructed in accordance with one embodiment.
- 10 Figure 7 illustrates a side elevational view of an introducing apparatus as constructed in accordance with one embodiment.
- Figure 8 illustrates a side elevational view of an introducing apparatus as constructed in accordance with one embodiment.
- 15 Figure 9 illustrates a side elevational view of an introducing apparatus as constructed in accordance with one embodiment.
- Figure 10 illustrates a side view of a portion of an introducing apparatus as constructed in accordance with another embodiment.
- 20 Figure 11 illustrates a side view of a portion of an introducing apparatus as constructed in accordance with another embodiment.
- 25 Figure 12 illustrates a side view of a portion of an introducing apparatus as constructed in accordance with another embodiment.

Description of the Embodiments

In the following detailed description, reference is made to the accompanying drawings which form a part hereof, and in which is shown by way of illustration specific embodiments in which the invention may be practiced. These embodiments are described in sufficient detail to enable those skilled in the art to practice the invention, and it is to be understood that other embodiments may be utilized and that structural changes may be made without departing from the scope of the present invention. Therefore, the following detailed description is not to be taken in a limiting sense, and the scope of the present invention is defined by the appended claims and their equivalents.

An introducer assembly 100, as shown in Figure 1A, includes generally a sheath 140 and a dilator 120. The dilator 120 allows for the introducer assembly 100 to be introduced into a vein of a patient, for instance, over a guidewire. The dilator 120 extends from a distal end to a proximal end, where the distal end is insertable into a patient. The distal end optionally ends in a tapered end. At the proximal end is a hub having a bore therethrough. The dilator 120 also includes a passage therethrough, aligned with the bore, which allows the dilator 120 to be inserted over a guidewire or a catheter. The dilator 120 is sized to be received by the sheath 140 therein.

The sheath 140 allows for additional instruments to be inserted therethrough and inserted into the patient. The sheath 140 includes various types of sheaths, for instance, the sheath 140 can comprise a sheath which has a strengthening braid of material. Alternatively, the sheath 140 includes those which are modified to prevent bends in the elongate sheath. The sheath 140 is defined in part by a longitudinal axis 147, and the sheath 140 extends from a distal end 142 to a proximal end 148. The distal end 142 is first inserted into the patient and the proximal end 148 remains outside of the patient. Near the distal end 142 is a tapered portion which provides a transition to a cylindrical portion 146. The sheath 140 also includes a passage 143 therethrough, where

the passage 143 is substantially aligned with the longitudinal axis 147 of the sheath 140. The passage 143 allows for the introduction of the dilator 120 therethrough. After the introducer assembly 100 has been inserted into a patient, and the dilator 120 is removed, other medical instruments can be easily
5 inserted into and through the sheath 140, and introduced into the patient.

The sheath 140 includes at least one tab 210 which extends radially outward from the sheath 140. In one embodiment, the sheath 140 includes two tabs 220 which are disposed 180 degrees from each other. Optionally, tab break lines 222 are disposed between along the sheath 140, for instance
10 between the two tabs 220

In another option, the sheath 140 is splittable such that the sheath 140 is separable into two or more components. The sheath 140 is separable, splittable, or slittable which prevents disruption to or removal of instruments or devices which have been inserted through the sheath 140. The separable sheath
15 140 is splittable in a number of manners such as including at least one score line 141. The sheath 140 is scored, and optionally two scores 141 are approximately 180 degrees from each other. The scores 141 are aligned with the optional tab break lines 222 such that the tab break lines 222 and the scores 141 are disposed between the two tabs 220. Alternatively, the sheath 140 is
20 separable using a slitting device, a rip cord or strengthening strip running along the longitudinal length of the sheath, a weakening which allows the introducer to be ripped apart, or other techniques which allow the sheath 140 to separate into two or more components.

A valve assembly 150 is coupled with the at least one tab 210 of the
25 sheath. Optionally, the valve assembly 150 is movably coupled with the at least one tab 210, where the valve assembly 150 is movable relative to a top surface 212 of the at least one tab 210. In another example, the valve assembly 150 is slidingly coupled with the at least one tab 210, as further described below.

The valve assembly 150 includes a seal 152 and a valve support member 154. The valve support member 154, in combination with the seal 152, provide a hemostatic valve which seals against instruments which are disposed therethrough. In addition, the valve assembly 150 provides a seal for the passage 143 of the sheath 140, where little or no air is allowed to enter the vein of a patient. The valve support member 154 comprises a single component which extends only partially around the seal 152, and is adapted to retain the seal 152 within an opening 149 of the valve support member 154. Since the valve support member 154 extends only partially around the seal 152, the valve assembly 150 is easily moved to and away from the longitudinal axis 147 of the sheath, regardless if an instrument is present therein. With respect to the seal 152, suitable materials include, but are not limited to, silicone, polyurethane, or rubber. The seal 152, in one option, comprises a single membrane. In one alternative, the seal 152 comprises two or more portions of a membrane which are held in place by the valve support member 154.

Figures 4A and 4B illustrate an alternative for the seal 152. The seal 152 is defined in part by a top surface 155 and a bottom surface 157. The seal 152 further includes a generally central recessed portion 159, where the recessed portion 159 is recessed away from the top surface 155. Optionally, the recessed portion 159 can be recessed away from the bottom surface 157 and/or recessed away from the top surface 155. The recessed portion 159, which alternatively can be offset from a central region, is the portion of the seal 152 which is directly adjacent to, or is where an instrument is disposed therethrough. The recessed portion 159 allows for lesser material to be provided for the seal 152 without affecting the pressure of the seal relative to the sheath and/or the instrument. This allows for an increased variety of instruments to be successfully disposed therethrough, without, for instance, damage to a softer instrument, or without damage to a distal tip of the instrument. Furthermore, the lack of damage to the instrument allows for the

physician to implant the instrument within a patient without distraction to the physician from concern of risk or actual damage to the instruments.

A further option is that the seal 152 includes a slitted portion 156 therein, as shown in Figures 1A, 1B, 5A, and 5B. The slitted portion 156 can include, but is not limited to, a number of different options such as a slit, a partial slit, a line of weakness, a perforated line, or a complete cut through the seal 152. Alternatively, the slitted portion 156 extends only partially from one side surface to another, as shown in Figure 4A. In yet another option, the seal 152 comprises multiple sealing components, for instance, which are disposed adjacent to one another. Figures 5A, 5B, and 5C illustrate alternative configurations for the seal 152. As shown in Figure 5A, the seal 152 includes a cut 151 which has a wave-shape. Advantageously, the wave-shape assists in preventing the valve assembly from inadvertently sliding off of an instrument disposed therethrough. In another alternative, as shown in Figure 5B, the seal 152 includes a cross cut 153, which further aids in the movement of the movable valve assembly around instruments disposed therethrough. In a further alternative, as shown in Figure 5C, the seal 152 includes a Y-shaped cut 149. The Y-shaped cut 149, the wave shape cut 151, and/or the cross cut 153 optionally extend only partially from one side surface to another. It should be noted that other variations to the slit are possible, and are considered within the scope of the invention.

The valve support member 154 retains the seal 152 thereto, as further described below. In addition, the valve support member 154 is coupled with the sheath 140, and allows for the valve assembly 150 to move relative to the sheath 140. The valve support member 154 is coupled with the seal 152 and the sheath 140 in a variety of different manners. For instance, the valve support member 154 is optionally removably coupled with the sheath 140, for example, with a snap-fit connection. Alternatively, the valve support member 154 is removably coupled with the sheath 140 by adhesively bonding the valve support member 154 with the sheath 140. Another option includes insert

molding the valve support member 154 with the sheath 140. Removably coupling the valve support member 154 allows for further options for the physician during the implant process, and also allows for the introducing apparatus to be fabricated in a more cost efficient manner.

5 In another option, as shown in Figures 2A, 2B, and 2C, the tab 310 of the sheath 140 includes a cut out 312 therein. The cut out 312 is sized and positioned to receive therein a portion of the valve support member 320. The valve support member 320 includes a member 322 extending therefrom. The member 322 is disposed through the cut out 312, such that the member 322 is
10 movably disposed within the cut out 312. As the member 322 moves within the cut out 312, the valve support member 320 moves relative to the tab 310 of the sheath 140. Coupled with the member 322 is a flange 326 which extends from the member 322. The flange 326 extends under a surface 314 of the tab 310, which retains the valve support member 320 to the tab 310.

15 Figure 3 illustrates another alternative manner in which the valve assembly 150 is movably coupled with the sheath 140. The valve assembly 150 includes a valve support member 350 which extends from a first side 352 to a second side 354. Coupled with the first side 352 and/or the second side 354 is an arm 356. The arm 356 is generally L-shaped and wraps around at
20 least a portion of the tab 362 of the sheath 140. The arm 356 is sized and positioned to movably couple the valve assembly 150 with the sheath 140. Optionally, the arm 356 allows for the valve assembly 150 to be removably coupled with the sheath 140.

 The valve assembly 150 moves relative to the sheath in many different
25 manners. In one example, as shown in Figures 1A and 1B, the valve support member 154 is adapted to slide along a longitudinal axis of the at least one tab, along "A". The valve support member 154, in one option, is disposed around only a portion of the seal 152. In another option, the valve support member 154 flexes as an instrument is disposed through the seal 152. The movable
30 valve assembly 150 is adapted to slide from a first position, as shown in Figure

1B, to a second position, as shown in Figure 1A. In the first position, the movable valve assembly 150 is disposed through the longitudinal axis of the sheath, sealing the passage of the sheath 140. In the second position, the movable valve assembly 150 is disposed away from the longitudinal axis of the sheath.

In another example, as shown in Figures 6 and 7, the movable valve assembly 150 is adapted to rotate about a hinge point 218 on the at least one tab of the sheath. As the movable valve assembly 150 rotates, the valve assembly 150 slides on a top surface 212 of the at least one tab 220. In another embodiment, as shown in Figures 8 and 9, the movable valve assembly 150 is adapted to rotate about a hinge point 219 on the at least one tab 220. As the movable valve assembly 150 rotates about the hinge point, at least a portion of the valve assembly 150 is lifted away from the top surface of the at least one tab. In yet another option, the introducer apparatus includes a removable side port, as shown in Figures 10 - 12.

A portion of an introducer apparatus 400 is shown in Figure 10 which includes a removable side port 420. The introducer apparatus 400, which is illustrated in Figures 10 - 12, optionally includes the movable valve assembly as discussed for the various embodiments described above. The removable side port 420 allows for the introduction of fluids such as saline or medicine through the sheath 410 without having to remove instruments disposed through the sheath 410. The removable side port 420 includes a coupling member 422 adapted to couple with a member 418 on the introducer apparatus 400, where the member 418 is disposed, in one option, on the sheath 410. Tubing 424 is connected between the coupling member 422 and a stopcock assembly 426, which facilitates the introduction of fluids therein.

The removable side port 420 is removably coupled with the sheath 410 in a number of manners. For instance, the coupling member 422 includes a threaded rotating collar 430 which is adapted to be threadingly coupled with a threaded portion 432 of the member 418. Optionally, when the coupling

member 422 is removed from the member 418, a cap 434 is disposed thereon to prevent blood loss and/or the introduction of air into the patient.

Figure 11 illustrates another embodiment of an introducer apparatus 400 having a removable side port 420. The removable side port 420 includes a coupling member 422 which is adapted to be removably coupled with the member 418. The member 418 and the coupling member 422 include snap-fit features 440 which allow for the member 418 and the coupling member 422 to be snap-fitted together. In one option, the member 418 includes a flange 442 which is received by the coupling member 422. Alternatively, the coupling member 422 is sized and positioned to fit with the member 418 by an interference fit.

Figure 12 illustrates yet another option of an introducer apparatus 400 having a removable side port 420. The removable side port 420 includes a coupling member 422 which is adapted to be removably coupled with the member 418. The member 418 includes features which allow for the member 418 be coupled with the removable side port 420. For instance, the member 418 includes a luer thread 416. In addition, the member 418 includes a valve 450 which prevents blood loss and air embolism when the removable side port 420 is detached. The valve 450 is disposed between the sheath 410 and the removable side port 420, and optionally comprises a silicone membrane 452.

The coupling member 422 includes an component 460 which is adapted to open the valve 450 when the coupling member 422 is coupled with the member 418. The component 460 includes a passage 462 therethrough which permits the introduction of fluids and/or medicine through the removable side port 420. Advantageously, when the coupling member 422 is removed from the sheath 410, the valve 450 seals the sheath 410, thereby preventing blood loss and air embolism.

Use of the apparatus, as described above and including the many variations, includes inserting an introducing apparatus into a body of a patient. For instance, the introducing apparatus includes an elongate tubular sheath

which has an external diameter, and the sheath has a bore including an internal diameter sized to receive a dilator therethrough. The sheath includes at least one tab extends away from a longitudinal axis of the sheath. A movable valve assembly is movably coupled with the at least one tab. The valve assembly is
5 moved from a first position to a second position. In the first position, the movable valve assembly is disposed through the longitudinal axis of the sheath. In the second position the movable valve assembly is disposed away from the longitudinal axis of the sheath. Optionally, the method further includes flexing the valve assembly as an instrument is inserted therethrough.

10 The present introducing assembly requires fewer parts, and is cheaper to make. In addition, since the valve is optionally removed prior to splitting of the sheath, the splitting of the sheath is easier to do. Furthermore, since the two or more membrane portions, or a slitted member, are already separated from one another as the seal is moved around and away from an instrument,
15 each of use of the device is increased since the seal and the valve support member need not be peeled away from the instrument. Further, since the valve apparatus can be moved away from the longitudinal axis of the sheath prior to insertion of an instrument therethrough, smaller and/or more flexible instruments can be used with the introducing assembly. Still further, the
20 optional recessed portion of the seal allows for less resistance as an instrument is inserted therethrough.

The implanter has more options in sealing the introducing apparatus, including the option of having the valve moved out of the way during a procedure. A further benefit is that a more effective seal is made around the
25 catheter or medical instrument since the device which retains or supports the valve optionally flexes, for example, as instruments are inserted therethrough.

It is to be understood that the above description is intended to be illustrative, and not restrictive. Many other embodiments will be apparent to those of skill in the art upon reading and understanding the above description.
30 It should be noted that embodiments or portions thereof discussed in different

portions of the description or referred to in different drawings can be combined to form additional embodiments of the present invention. The scope of the invention should, therefore, be determined with reference to the appended claims, along with the full scope of equivalents to which such claims are
5 entitled.

What is claimed is:

1. An introducing apparatus comprising:
an elongate tubular sheath having an external diameter, the sheath
5 having a bore including an internal diameter sized to receive a dilator
therethrough;
the sheath extending from a distal end to a proximal end;
the sheath including at least one tab extending away from a longitudinal
axis of the sheath; and
10 a movable valve assembly movably coupled relative to the at least one
tab, the moveable valve assembly adapted to move from a first position to a
second position, in the first position the movable valve assembly disposed
through the longitudinal axis of the sheath, in the second position the movable
valve assembly disposed away from the longitudinal axis of the sheath.
15
2. The introducing apparatus as recited in claim 1, wherein the movable
valve assembly is adapted to slide relative to the at least one tab.
3. The introducing apparatus as recited in claims 1 or 2, wherein the
20 movable valve assembly includes a membrane coupled with a sliding member.
4. The introducing apparatus as recited in claim 3, wherein the membrane
includes at least one slit therein.
- 25 5. The introducing apparatus as recited in claim 3 or 4, wherein the
membrane includes two or more membrane components.
6. The introducing apparatus as recited in claim 4, wherein the at least one
slit has a wave shape.

30

7. The introducing apparatus as recited in claim 4, wherein the at least one slit has a cross-shape or a Y-shape.
8. The introducing apparatus as recited in any of the above recited claims,
5 wherein the at least one tab is defined in part by a tab longitudinal axis, and the movable valve assembly is adapted to slide along the tab longitudinal axis.
9. The introducing apparatus as recited in claim 1, wherein the movable valve assembly is adapted to rotate about a hinge point on the at least one tab.
10
10. The introducing apparatus as recited in claim 1, wherein the movable valve assembly includes a valve support member coupled with a seal, and the valve support member extends only partially around the seal.
- 15 11. The introducing apparatus as recited in claim 1, wherein the movable valve assembly comprises a sliding valve assembly slidably engaged with the at least one tab, the sliding valve adapted to slide from a first position to a second position, in the first position the sliding valve disposed through the longitudinal axis of the sheath, in the second
20 position the sliding valve disposed away from the longitudinal axis of the sheath.
12. The introducing apparatus as recited in claim 1, wherein the movable valve assembly includes a valve support member coupled with a seal, and the
25 valve support member includes at least one arm encompassing the at least one tab.
13. The introducing apparatus as recited in claim 1, wherein the movable valve assembly includes a valve support member coupled with a seal, the at

least one tab including a recess therein, the valve support member includes a member extending therefrom, the member slidably disposed within the recess.

14. The introducing apparatus as recited in any of the above recited claims,
5 further comprising a removable side port.

15. The introducing apparatus as recited in any of the above recited claims,
wherein the is sheath is separable without damage to instruments
disposed therein.

10

16. An introducing apparatus comprising:

an elongate tubular sheath having an external diameter, the sheath
having a bore including an internal diameter sized to receive a dilator
therethrough, the sheath comprising a separable sheath;

15 the sheath extending from a distal end to a proximal end;

the sheath including at least one tab extending away from a longitudinal
axis of the sheath;

a movable valve assembly movably coupled relative to the at least one
tab, the moveable valve assembly adapted to slide from a first position to a

20 second position; and

a removable side port coupled with the sheath.

17. The apparatus as recited in claim 16, wherein the movable valve
assembly is adapted to slide relative to the at least one tab, the movable valve
25 assembly includes a membrane coupled with a valve support member, the
membrane having a slit therein, and the valve support member extends only
partially around the membrane.

30

18. An introducing apparatus comprising:
an elongate tubular sheath having an external diameter, the sheath
having a bore including an internal diameter sized to receive a dilator
therethrough, the sheath comprising a separable sheath;
5 the sheath extending from a distal end to a proximal end;
the sheath including at least one tab extending away from a longitudinal
axis of the sheath;
a valve assembly coupled with the at least one tab, the valve assembly
including a membrane having a slit therein; and
10 a means for moving the valve assembly relative to the at least one tab.
19. The introducing apparatus as recited in claim 18, further comprising a
removable side port coupled with the sheath.
- 15 20. The introducing apparatus as recited in claim 18, further comprising a
means for removing the valve assembly from the sheath.
21. A method comprising:
inserting an introducing apparatus into a body, the introducing
20 apparatus including an elongate tubular sheath having an external diameter, the
sheath having a bore including an internal diameter sized to
receive a dilator therethrough;
the sheath extending from a distal end to a proximal end;
the sheath including at least one tab extending away from a longitudinal
25 axis of the sheath;
a movable valve assembly movably coupled relative to the at least one
tab, the movable valve assembly including a membrane having a two or
more membrane components, the movable valve assembly adapted to
seal a longitudinal passage of the sheath; and

moving the valve assembly from a first position to a second position, in the first position the movable valve assembly disposed through the longitudinal axis of the sheath, in the second position the movable valve assembly disposed away from the longitudinal axis of the sheath.

5

22. The method as recited in claim 21, further comprising moving the valve assembly from the second position to the first position prior to separating the sheath.

10 23. The method as recited in claim 21, further comprising removing a removable side port coupled with the sheath.

24. An introducing apparatus comprising:

an elongate tubular sheath having an external diameter, the sheath

15 having a bore including an internal diameter sized to receive a dilator therethrough, the sheath comprising a separable sheath;

the sheath extending from a distal end to a proximal end;

the sheath including at least one tab extending away from a longitudinal axis of the sheath; and


20 a side port assembly removably coupled with the sheath, and the side port assembly is adapted to be removed from the sheath without damage or separation of the sheath.


25 25. The introducing apparatus as recited in claim 24, wherein the side port assembly is coupled with the sheath with a snap-fit connection.



26. The introducing apparatus as recited in claim 24, wherein the side port assembly is threadingly coupled with the sheath.

30

27. The introducing apparatus as recited in claim 24, further comprising a valve disposed between the sheath and the side port assembly.
- 5 28. The introducing apparatus as recited in claim 24, further comprising a movable valve assembly movably coupled relative to the at least one tab, the moveable valve assembly adapted to move from a first position to a second position, in the first position the movable valve assembly disposed through the longitudinal axis of the sheath, in the second position the movable
10 valve assembly disposed away from the longitudinal axis of the sheath.
29. The introducing apparatus as recited in claim 24, further comprising a valve assembly coupled with the sheath.

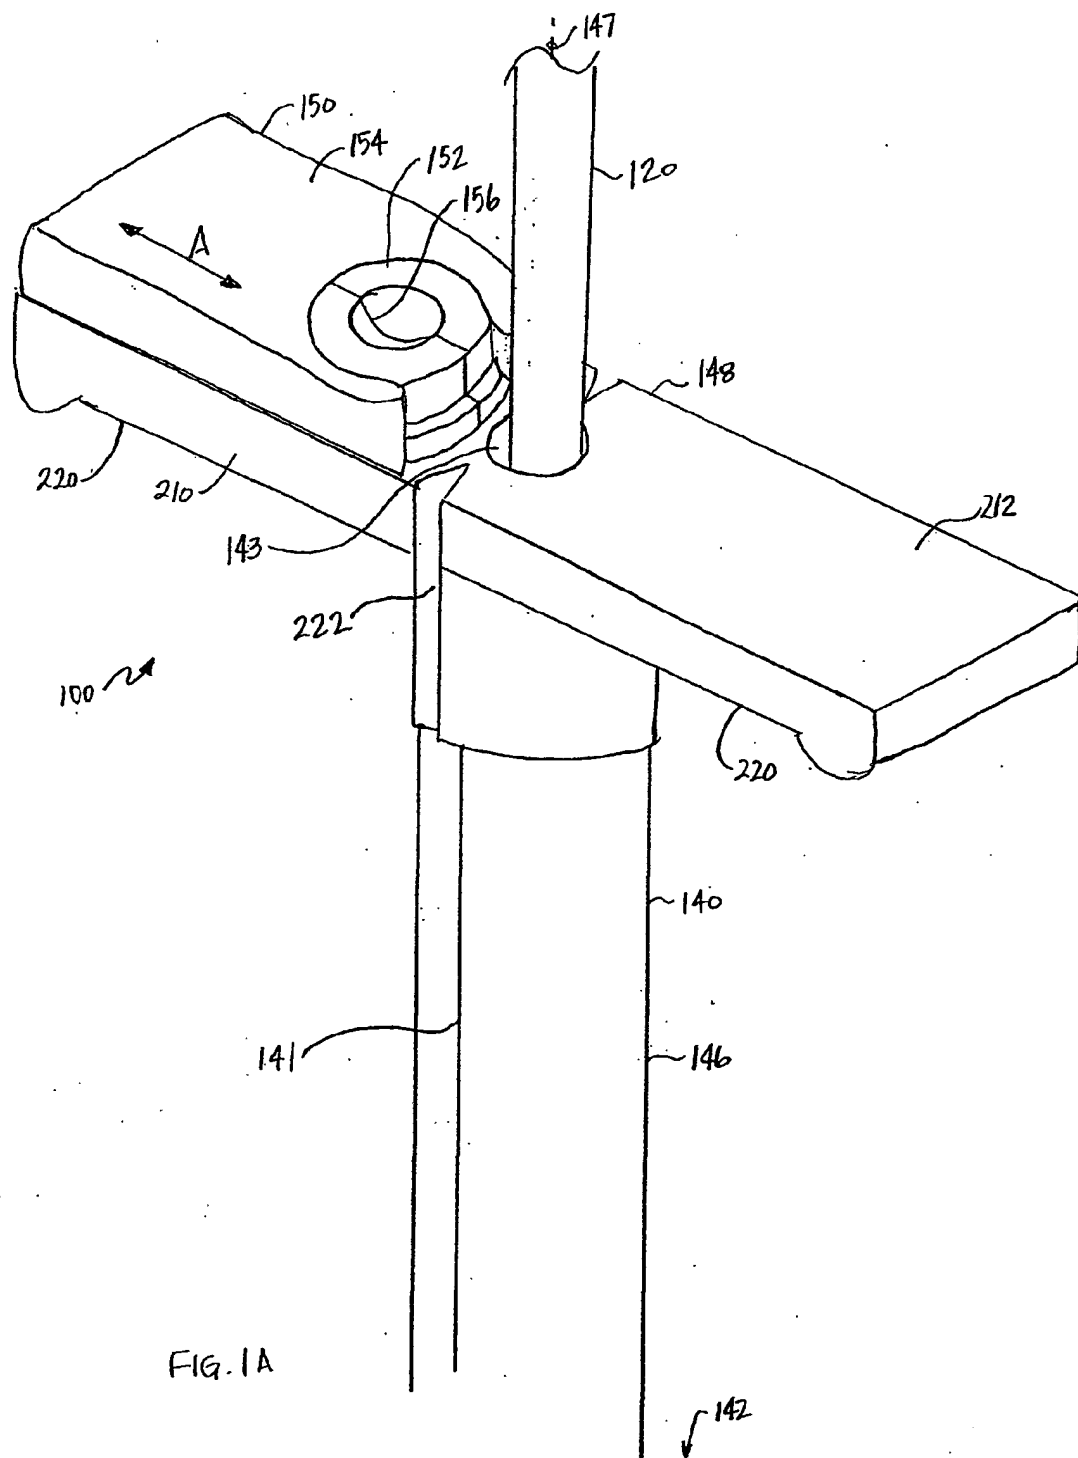

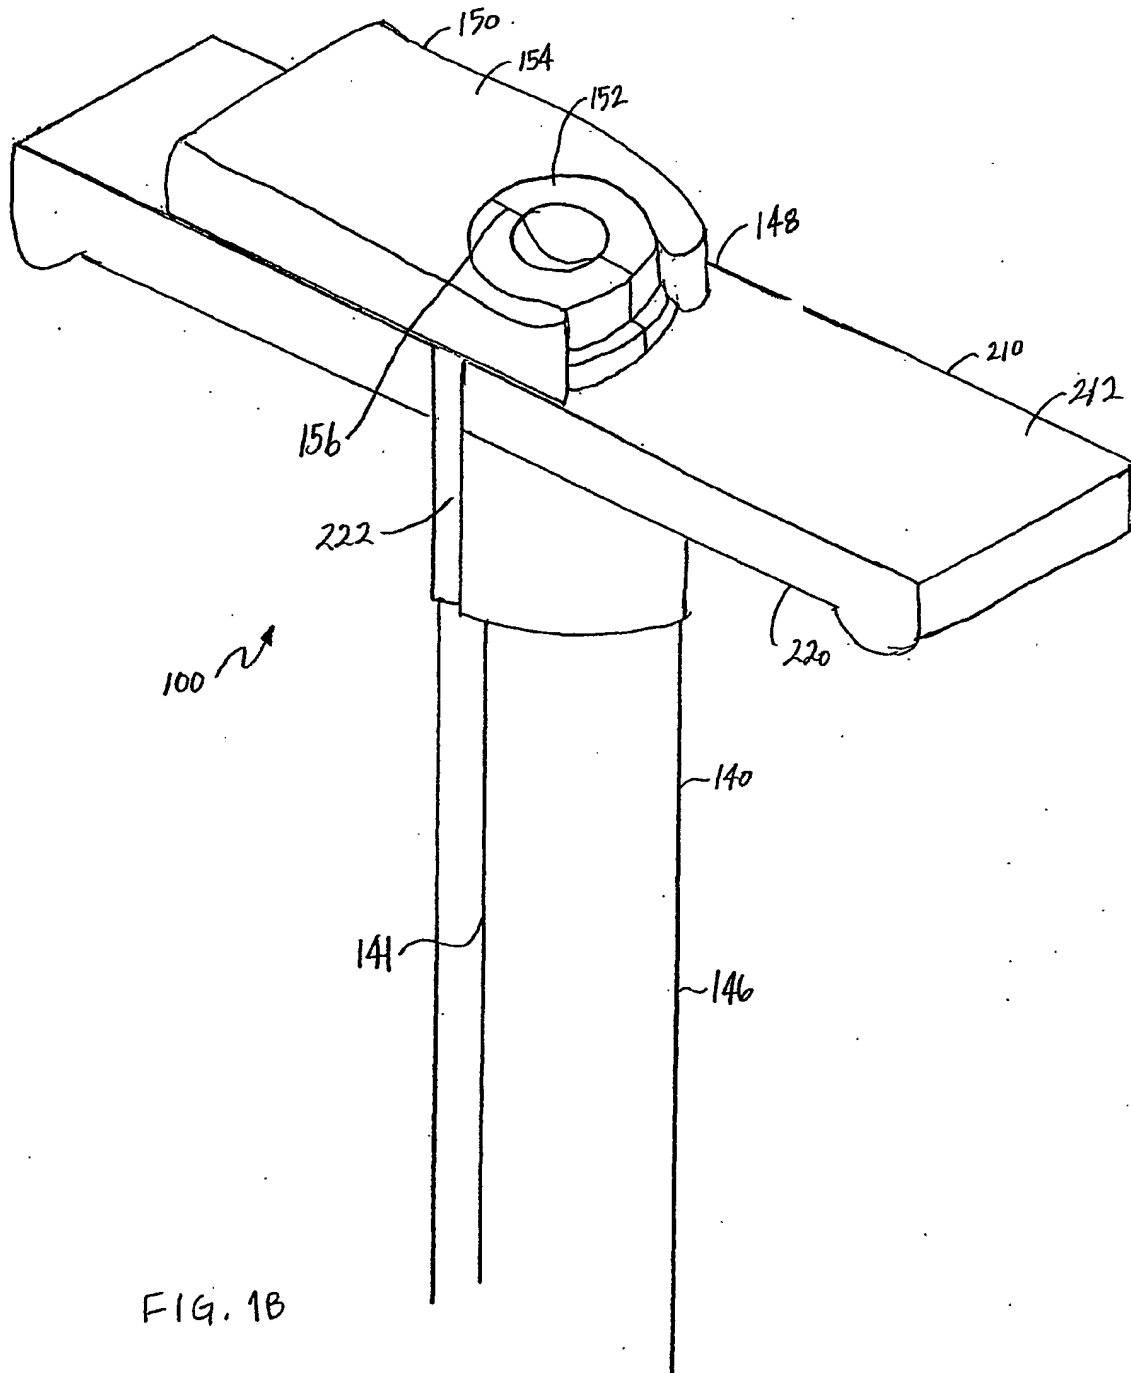

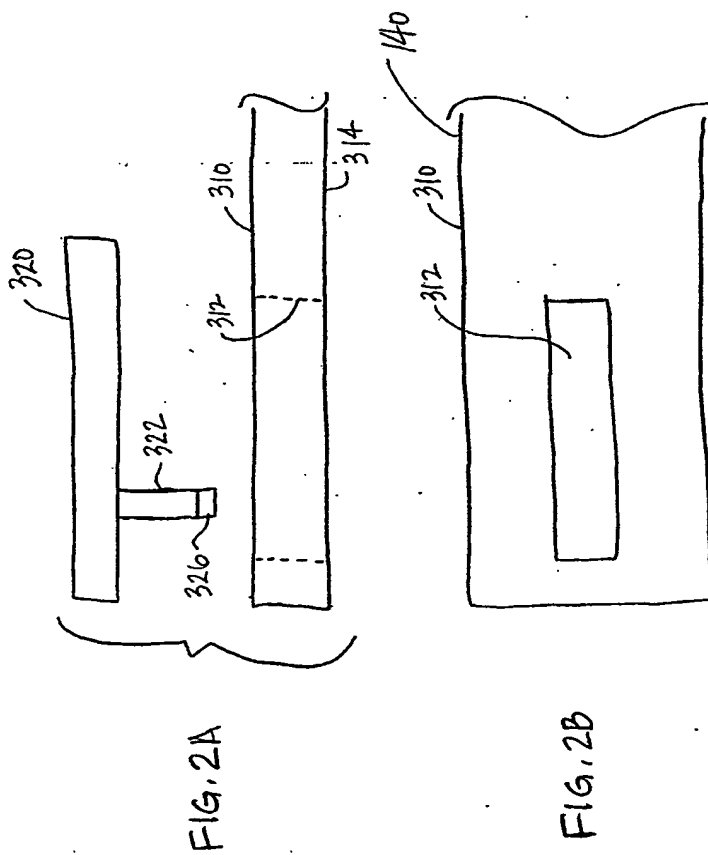

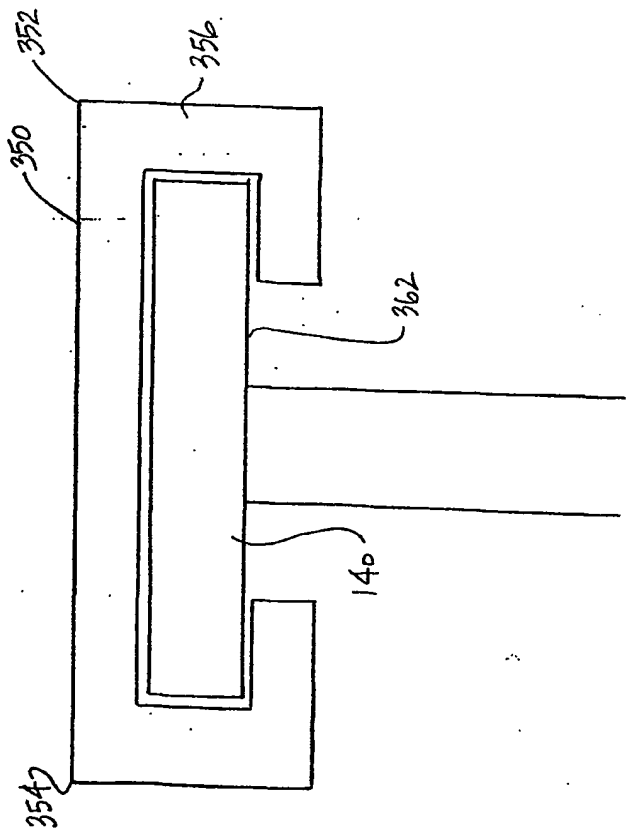


FIG. 3

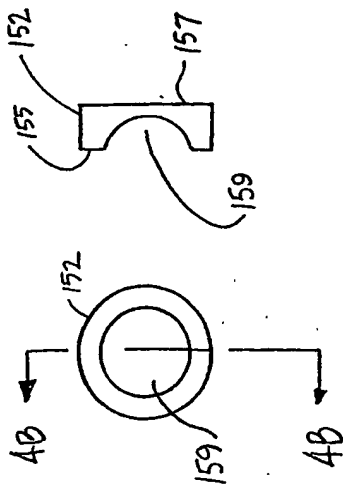


FIG. 4A

FIG. 4B

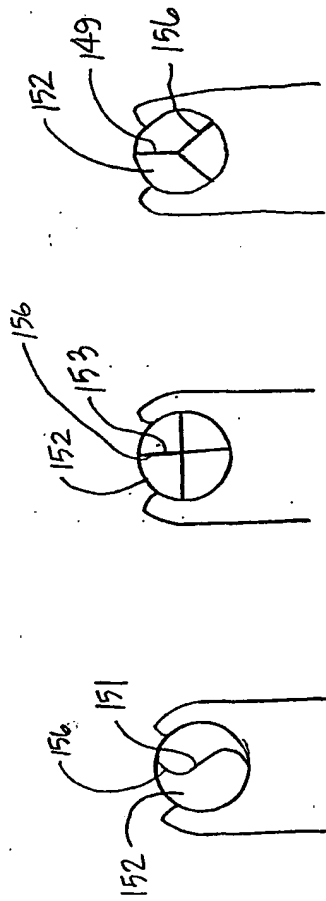


FIG. 5A

FIG. 5B

FIG. 5C




FIGURE 8

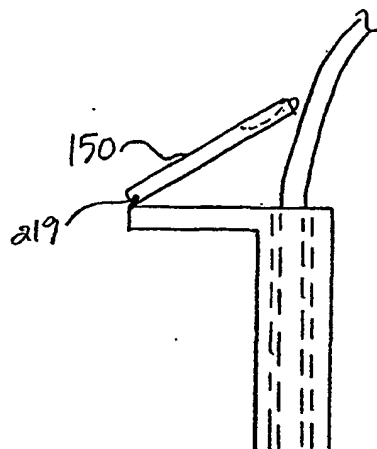


FIGURE 9

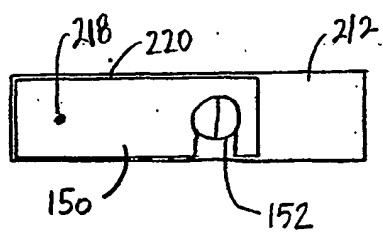


FIGURE 6

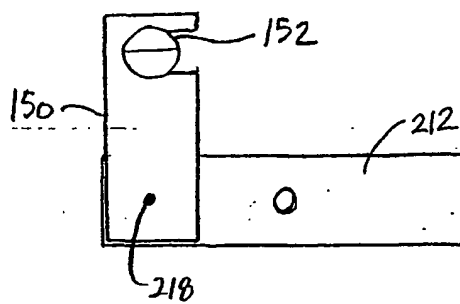


FIGURE 7

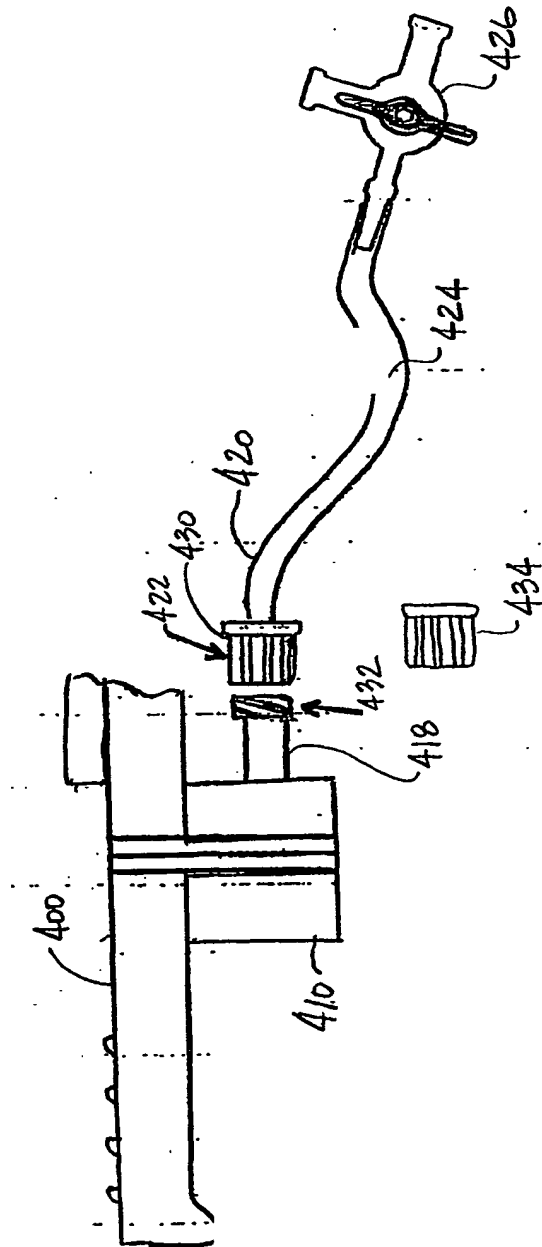


FIGURE 10

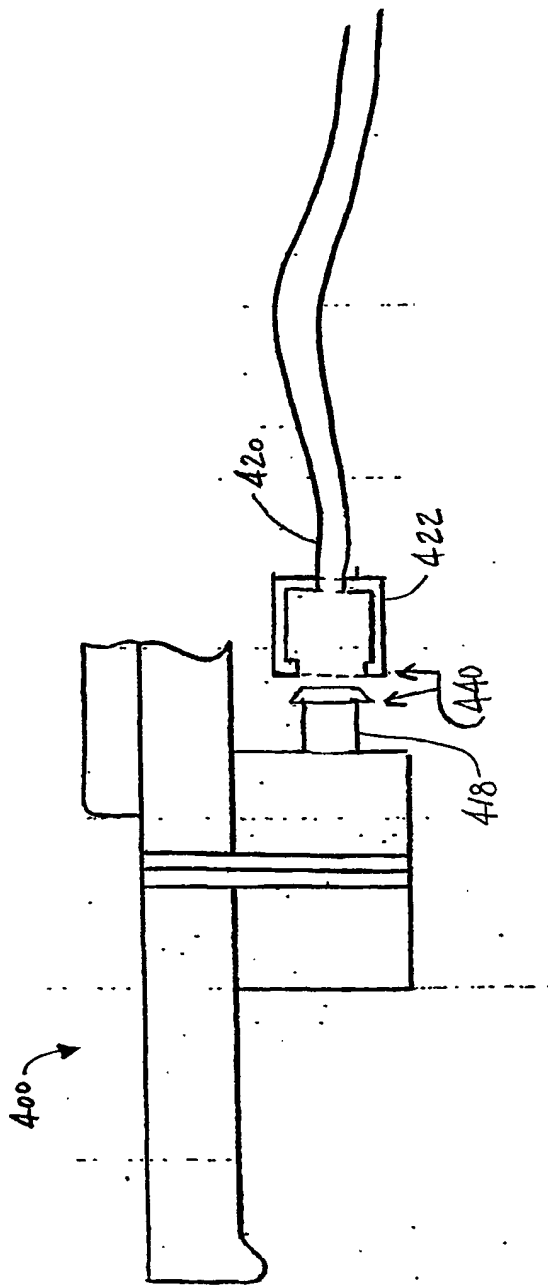


FIGURE 11

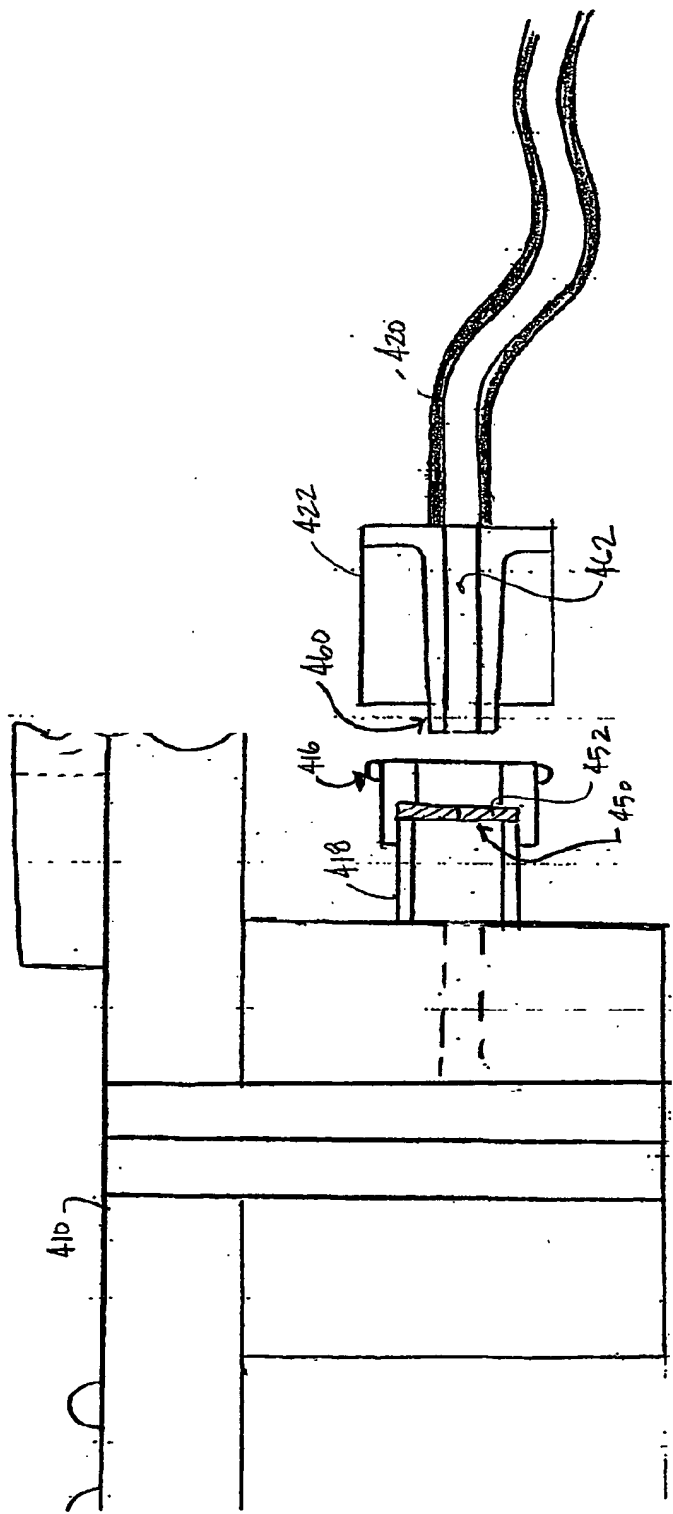


FIG. 12

(12) INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(19) World Intellectual Property Organization
International Bureau



(43) International Publication Date
24 January 2002 (24.01.2002)


PCT

(10) International Publication Number
WO 02/005867 A3

- (51) International Patent Classification⁷: **A61M 25/06**
- (21) International Application Number: **PCT/US01/22070**
- (22) International Filing Date: **13 July 2001 (13.07.2001)**
- (25) Filing Language: **English**
- (26) Publication Language: **English**
- (30) Priority Data:
09/615,276 13 July 2000 (13.07.2000) **US**
- (71) Applicant (for all designated States except US): **MEDAM-ICUS, INC.** [US/US]; 15301 Highway 55 West, Minneapolis, MN 55447 (US).
- (72) Inventors; and
- (75) Inventors/Applicants (for US only): **LANGE, Michael** [US/US]; 1708 Fair Oaks Drive, White Bear Lake, MN 55110 (US). **KRAUS, Mark, C.** [US/US]; 6935 Dylan Lane, Independence, MN 55359 (US).
- (74) Agent: **VIKSINNS, Ann, S.**; Schwegman, Lundberg, Woessner & Kluth, P.O. Box 2938, Minneapolis, MN 55402 (US).
- (81) Designated States (national): AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NO, NZ, PL, PT, RO, RU, SD, SE, SG, SI, SK, SL, TJ, TM, TR, TT, TZ, UA, UG, US, UZ, VN, YU, ZA, ZW.
- (84) Designated States (regional): ARIPO patent (GH, GM, KE, LS, MW, MZ, SD, SL, SZ, TZ, UG, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, CH, CY, DE, DK, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE, TR), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, GW, ML, MR, NE, SN, TD, TG).

[Continued on next page]

(54) Title: **INTRODUCER HAVING A MOVABLE VALVE ASSEMBLY WITH REMOVABLE SIDE PORT**

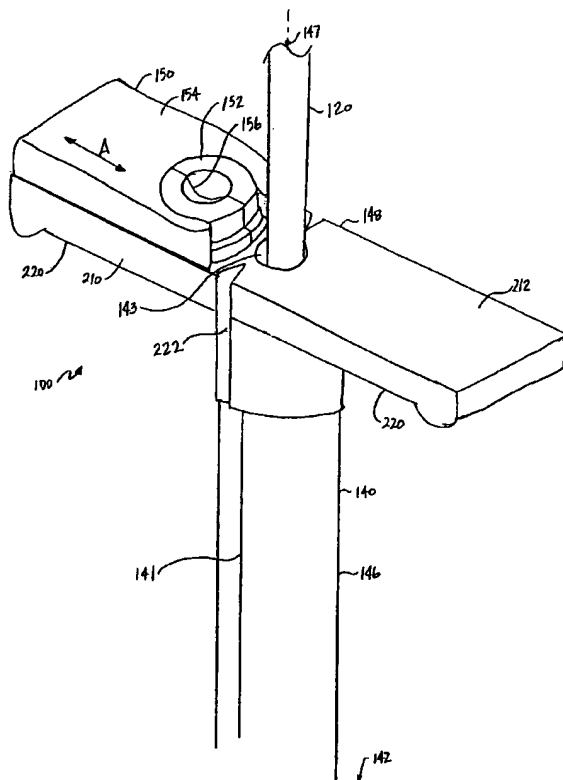

(57) Abstract: An introducing apparatus includes an elongate tubular sheath having an external diameter, and the sheath has a bore including an internal diameter sized to receive a dilator therethrough. The sheath includes at least one tab extending away from a longitudinal axis of the sheath. A movable valve assembly is movably engaged with the tab, where the moving valve is adapted to move from a first position to a second position. In the first position the moving valve is disposed through the longitudinal axis of the sheath. In the second position the moving valve assembly is disposed away from the longitudinal axis of the sheath.

WO 02/005867 A3



Published:

— *with international search report*

For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.

(88) Date of publication of the international search report:

25 September 2003

INTERNATIONAL SEARCH REPORT

In International Application No
PCT/US 01/22070

A. CLASSIFICATION OF SUBJECT MATTER
IPC 7 A61M25/06

According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)

IPC 7 A61M

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practical, search terms used)

EPO-Internal, WPI Data, PAJ

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category *	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	US 5 397 311 A (WALKER JACK M ET AL) 14 March 1995 (1995-03-14)	1-4,7,8, 10-12, 15,18,20
A	column 8, line 7 - line 36; figures	16,17, 24,28,29
X	WO 93 20879 A (MEDTRONIC INC) 28 October 1993 (1993-10-28)	1,2,8,11
A	page 10, line 1 - line 28; figures	16,18, 24,28,29
A	US 5 613 953 A (POHNDORF PETER J) 25 March 1997 (1997-03-25) abstract; figures	1,16,18, 24,28,29
	--- -/--	

☒ Further documents are listed in the continuation of box C.

☒ Patent family members are listed in annex.

* Special categories of cited documents :

- *A* document defining the general state of the art which is not considered to be of particular relevance
- *E* earlier document but published on or after the international filing date
- *L* document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)
- *O* document referring to an oral disclosure, use, exhibition or other means
- *P* document published prior to the international filing date but later than the priority date claimed

- *T* later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention
- *X* document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone
- *Y* document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art.
- *&* document member of the same patent family

Date of the actual completion of the international search

14 October 2002

Date of mailing of the international search report

28. 10. 2002

Name and mailing address of the ISA

European Patent Office, P.B. 5818 Patentlaan 2
NL - 2280 HV Rijswijk
Tel. (+31-70) 340-2040, Tx. 31 651 epo nl
Fax: (+31-70) 340-3016

Authorized officer

Kousouretas, I

INTERNATIONAL SEARCH REPORT

International Application No

PCT/US 01/22070

C.(Continuation) DOCUMENTS CONSIDERED TO BE RELEVANT

Category *	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	WO 99 34849 A (ERP WILHELMUS PETRUS MARTINUS ;CORDIS CORP (US)) 15 July 1999 (1999-07-15)	24,29
A	page 4, line 16 -page 5, line 3; figures ---	14,16,19
A	US 4 387 879 A (TAUSCHINSKI STEFAN) 14 June 1983 (1983-06-14) column 3, line 1 - line 3; figure 4 ---	3,4
P,X	WO 01 32257 A (SCIMED LIFE SYSTEMS INC) 10 May 2001 (2001-05-10)	1,9,15
A	the whole document ---	16,18
X	US 5 125 904 A (LEE HONGPYO H) 30 June 1992 (1992-06-30) cited in the application abstract; figures ---	24,29
A	EP 0 544 655 A (BAXTER INT) 2 June 1993 (1993-06-02) column 6, line 36 -column 7, line 58; figures ---	24-26
A	US 5 944 697 A (BICHE JOSEPH E) 31 August 1999 (1999-08-31) column 3, line 60 -column 4, line 18; figures ---	24
A	EP 0 593 181 A (COOK INC) 20 April 1994 (1994-04-20) abstract; figures -----	24

INTERNATIONAL SEARCH REPORT

International application No.
PCT/US 01/22070

Box I Observations where certain claims were found unsearchable (Continuation of item 1 of first sheet)

This International Search Report has not been established in respect of certain claims under Article 17(2)(a) for the following reasons:

1. ☒ Claims Nos.: 21-23
because they relate to subject matter not required to be searched by this Authority, namely:
Rule 39.1(iv) PCT - Method for treatment of the human or animal body by surgery
2. ☐ Claims Nos.:
because they relate to parts of the International Application that do not comply with the prescribed requirements to such an extent that no meaningful International Search can be carried out, specifically:
3. ☐ Claims Nos.:
because they are dependent claims and are not drafted in accordance with the second and third sentences of Rule 6.4(a).

Box II Observations where unity of invention is lacking (Continuation of item 2 of first sheet)

This International Searching Authority found multiple inventions in this International application, as follows:

see additional sheet

1. ☒ As all required additional search fees were timely paid by the applicant, this International Search Report covers all searchable claims.
2. ☐ As all searchable claims could be searched without effort justifying an additional fee, this Authority did not invite payment of any additional fee.
3. ☐ As only some of the required additional search fees were timely paid by the applicant, this International Search Report covers only those claims for which fees were paid, specifically claims Nos.:
4. ☐ No required additional search fees were timely paid by the applicant. Consequently, this International Search Report is restricted to the invention first mentioned in the claims; it is covered by claims Nos.:

Remark on Protest

- ☐ The additional search fees were accompanied by the applicant's protest.
- ☒ No protest accompanied the payment of additional search fees.

FURTHER INFORMATION CONTINUED FROM PCT/ISA/ 210

This International Searching Authority found multiple (groups of) inventions in this international application, as follows:

1. Claims: 1-20

An introducing apparatus comprising an elongate tubular sheath, the sheath including at least one tab and a movable valve assembly coupled relative to at least one tab and adapted to move from a first position to a second position.

2. Claims: 24-29

An introducing apparatus comprising an elongate tubular sheath, the sheath including at least one tab and a side port assembly coupled with the sheath and adapted to be removed from the sheath without damage or separation of the sheath.

INTERNATIONAL SEARCH REPORT

Information on patent family members

 International Application No
 PCT/US 01/22070

Patent document cited in search report		Publication date	Patent family member(s)	Publication date
US 5397311	A	14-03-1995	US 5755693 A	26-05-1998
WO 9320879	A	28-10-1993	AU 3471193 A	18-11-1993
			CA 2102617 A1	10-10-1993
			DE 69305040 D1	31-10-1996
			DE 69305040 T2	10-04-1997
			EP 0588996 A1	30-03-1994
			JP 2525724 B2	21-08-1996
			JP 6502797 T	31-03-1994
			WO 9320879 A1	28-10-1993
			US 5441504 A	15-08-1995
US 5613953	A	25-03-1997	AU 711662 B2	21-10-1999
			AU 1898997 A	30-10-1997
			CA 2200810 A1	26-10-1997
			EP 0803265 A1	29-10-1997
			JP 10033691 A	10-02-1998
WO 9934849	A	15-07-1999	NL 1007997 C2	12-07-1999
			WO 9934849 A1	15-07-1999
US 4387879	A	14-06-1983	DE 2817102 A1	31-10-1979
			DK 160079 A ,B,	20-10-1979
			FR 2423230 A1	16-11-1979
			GB 2019219 A ,B	31-10-1979
			JP 1401020 C	28-09-1987
			JP 54142888 A	07-11-1979
			JP 62009345 B	27-02-1987
WO 0132257	A	10-05-2001	WO 0132257 A1	10-05-2001
US 5125904	A	30-06-1992	AT 189774 T	15-03-2000
			CA 2112394 A1	21-01-1993
			DE 69230689 D1	23-03-2000
			DE 69230689 T2	26-10-2000
			EP 0593685 A1	27-04-1994
			EP 0948970 A2	13-10-1999
			ES 2146588 T3	16-08-2000
			JP 2001527425 T	25-12-2001
			WO 9300947 A1	21-01-1993
			US 5312355 A	17-05-1994
EP 0544655	A	02-06-1993	EP 0544653 A2	02-06-1993
			EP 0544654 A2	02-06-1993
			EP 0544655 A2	02-06-1993
			AU 648668 B2	28-04-1994
			AU 1738592 A	30-07-1992
			AU 3039189 A	11-08-1989
			AU 626831 B2	13-08-1992
			AU 661423 B2	20-07-1995
			AU 5522094 A	23-06-1994
			AU 661424 B2	20-07-1995
			AU 5522194 A	23-06-1994
			CA 1335167 A1	11-04-1995
			CA 1337924 A1	16-01-1996
			CA 1337925 A1	16-01-1996
			DE 68916876 D1	25-08-1994
			DE 68916876 T2	09-03-1995

INTERNATIONAL SEARCH REPORT

Information on patent family members

International Application No

PCT/US 01/22070

Patent document cited in search report		Publication date	Patent family member(s)	Publication date
EP 0544655	A		DE 68919861 D1	19-01-1995
			DE 68919861 T2	03-08-1995
			DE 68924604 D1	23-11-1995
			DE 68924604 T2	27-06-1996
			DE 68926627 D1	11-07-1996
			DE 68926627 T2	02-01-1997
			DE 68927896 D1	24-04-1997
			DE 68927896 T2	23-10-1997
			EP 0354947 A1	21-02-1990
			EP 0659448 A1	28-06-1995
			ES 2012610 A6	01-04-1990
			IE 62644 B	22-02-1995
			IE 67649 B1	17-04-1996
			IE 69389 B1	18-09-1996
			IE 69388 B1	18-09-1996
			JP 2502976 T	20-09-1990
			JP 5032071 B	14-05-1993
			WO 8906553 A2	27-07-1989
			US 6261266 B1	17-07-2001
			US 6213996 B1	10-04-2001
			US 6447498 B1	10-09-2002
			US 6193697 B1	27-02-2001
			US 5135489 A	04-08-1992
			US 5100394 A	31-03-1992
			US 6217568 B1	17-04-2001
			US 5797897 A	25-08-1998
			US 5964785 A	12-10-1999
			US 5167648 A	01-12-1992
			US 5171234 A	15-12-1992
			US 5158554 A	27-10-1992
			US 5188620 A	23-02-1993
			US 5871500 A	16-02-1999
			US 5658260 A	19-08-1997
			US 5899888 A	04-05-1999
<hr/>				
US 5944697	A	31-08-1999	NONE	
<hr/>				
EP 0593181	A	20-04-1994	US 5250038 A	05-10-1993
			CA 2107321 A1	10-04-1994
			EP 0593181 A2	20-04-1994
			JP 6190053 A	12-07-1994
<hr/>				

**This Page is Inserted by IFW Indexing and Scanning
Operations and is not part of the Official Record**

BEST AVAILABLE IMAGES

Defective images within this document are accurate representations of the original documents submitted by the applicant.

Defects in the images include but are not limited to the items checked:

- ☐ **BLACK BORDERS**
- ☐ **IMAGE CUT OFF AT TOP, BOTTOM OR SIDES**
- ☐ **FADED TEXT OR DRAWING**
- ☒ **BLURRED OR ILLEGIBLE TEXT OR DRAWING**
- ☐ **SKEWED/SLANTED IMAGES**
- ☐ **COLOR OR BLACK AND WHITE PHOTOGRAPHS**
- ☐ **GRAY SCALE DOCUMENTS**
- ☐ **LINES OR MARKS ON ORIGINAL DOCUMENT**
- ☐ **REFERENCE(S) OR EXHIBIT(S) SUBMITTED ARE POOR QUALITY**
- ☐ **OTHER:** _____

IMAGES ARE BEST AVAILABLE COPY.

As rescanning these documents will not correct the image problems checked, please do not report these problems to the IFW Image Problem Mailbox.